

PCB400ATXA-W



GENERAL SPECIFICATION

This specification describes the performance characteristics of a grounded, single phase, 400 watts, 6 output level power supply with ATX Form Factor, remote control, +3.3V, +5V, +12V, -5V, -12V and +5Vsb. In addition, it defines a worldwide safety requirement and electromagnetic compatibility requirement of ATX power supply.

1) INPUT

Description	Min.	Nominal	Max.	Condition
Input Voltage	Low Range	95VAC	115VAC	132VAC
	High Range	190VAC	230VAC	264VAC
VOLTAGE SELECTION	With Auto Range function.			
Input Current (RMS)	5A@230vAC	-	10A@115vAC	
Line Frequency	47Hz	50/60Hz	63Hz	-
Inrush Current	65 Amps peak max. for one half cycle of AC 115V (cold start)			
	130 Amps peak max. for one half cycle of AC 230V (cold start)			
Efficiency	-	-	70%	At full load; with the AC input at any nominal low range of high range voltage

2) OUTPUT

2.1) STATIC DC LOAD

NOMINAL VOLTAGE (DC)	LOAD MIN.	CURRENT MAX.	REGULATION (%)
+3.3 V	0.0 A	22 A	+/- 5
+5 V	2.0 A	40 A	+/- 5
-5 V	0.0 A	0.5 A	+/- 5
+12 V	0.5 A	15 A	+/- 5
-12 V	0.0 A	1.5 A	+/- 10
+5 Vsb	0.0 A	1.5 A	+/- 5

NOTE: The total output of 3.3V & 5V should not exceed 215 watts and the total output should be 400 watts the max.

2.2) REMOTE ON/OFF CONTROL

As logic level is LOW: Output voltage is enabled.

As logic level is HIGH or floating: Output voltage is disabled.

Note: Logic high level: 3.5-5.25V Logic low level: 0-0.5V

2.3) AC OUTPUT CONNECTOR (Optional)

	Minimum--Maximum	Maximum Output Current
Low Range	95 VAC ---132 VAC	1 Amps
High Range	190 VAC ---264 VAC	0.5 Amps

2.4) RIPPLE AND NOISE

The ripple and noise of the outputs should be measured at the full load

Output Voltage (DC)	Ripple & Noise (p-p)
+3.3 V	50 mV
+5 V	60 mV
-5 V	60 mV
+12 V	120 mV
-12 V	120 mV
+5 Vsb	100 mV

NOTE: 20MHz bandwidth ripple & noise is measured by using 0.1uF C.C. & 47uF/50V E.C. bypassed at the output connector.

2.5) HOLD UP TIME

The power supply unit should maintain its proper output voltage within voltage specifications for at least 16.7 milliseconds after losing input power under the condition of 115 VAC (or 230 VAC input) with 75% loading.

2.6) OPERATION AT NO LOAD

The power supply shall be capable of being operated with no load on any or all outputs without damage. For no load on +3.3V & +5V, the output shall not Exceed +4.5 & +6.5VDC and the power supply may shutdown and require by Remote-control or remove AC power restart.

3) OVERSHOOT

Any overshoots during turning-on or turning-off should be less than +/-5% of the nominal output voltage values. All outputs shall fail within the regulation limit of paragraph 2.1 before the power good signal is issued.

4) TEMPRATURE COEFICIENT

The temperature coefficient of all outputs is +/-0.05% per degree C maximum.

5) PROTECTION:

5.1) OVER VOLTAGE PROTECTION:

If any over voltage occurs, the power supply should latch off before any output exceeds its limit below:

NOMINAL VOLTAGE (V)	OVERVOLTAGE RANGE (V)	
	FROM	TO
+3.3	4.0	4.5
+5	5.6	6.5
+12	13.5	15.5

The power supply will not be automatically recovered after the over voltage fault being removed. A manual power reset is necessary.

5.3) SHORT CIRCUIT PROTECTION

Any short circuit occurred on any DC output should not cause any damage to the power supply or shut down the power supply. The power supply will not be automatically recovered after the short circuit being removed. A manual power reset is necessary.

5.4) OVERLOAD PROTECTION


An over load protection will be effected when either of the loadings: +5V combine with +3.3V and +12V exceeds +110% to 160%. The power supply won't be automatically recovered after the overload being removed. It needs to do the input power reset.

6) TURN-ON DELAY (RISE TIME)

After turning on, at least 20 mS will be needed for the rise of +5V output voltage(measured from 10% point to 95% point on the waveform) to reach Its peak.

7) POWER GOOD SIGNAL (POWER-ON TIME)

After power-on with nominal AC input, there might be a turn-on delay (between 100mS to 500mS) before the Power Good Signal is issued, which occurs before +5V output reaches its minimum sense Level of +4.75V. When turn-off, the power Good Signal shall go to a lower level for at least 1 mS before +5V falls under the regulation limit described in paragraph 2.1

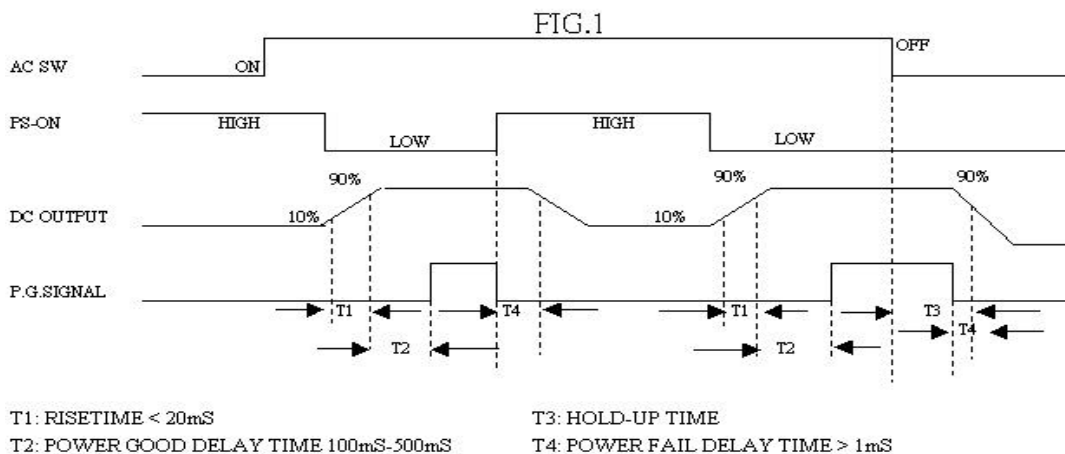

8) SAFETY PROVIDED

- UL - UL1950, 3rd Edition
- CSA - CSA22.2 No.950
- TUV - EN60950
- CB - IEC950
- FCC - Class “ B “
- CE - EN55022 class “ B “
 - EN61000-4-2
 - EN61000-4-3
 - EN61000-4-4
 - EN61000-4-5

8.1) DIELECTRIC WITHSTAND

- Primary to Secondary : 1500 VAC for 60 Sec.
- Primary to Frame Ground : 1500 VAC for 60 Sec.

8.2) INSULATION RESISTANCE

- Primary to Secondary : 20 Meg. Ohms Min. 500 VDC.
- Primary to Frame Ground : 20 Meg. Ohms Min. 500 VDC.
- Secondary to Frame Ground : 10 Meg. Ohms Min. 500 VDC.

9) ENVIRONMENT

9.1) OPERATING:

- Temperature: 0 to 40 degree centigrade
- Relative Humidity: 10 to 90 percent, non-condensing

9.2) SHIPPING AND STORAGE

- Temperature: -40 to +70 degree centigrade
- Relative Humidity: 5 to 95 percent, non-condensing

10) WARRANTY

One Year (MTBF 80,000 Hrs, DC fan not guaranteed)

11) DIMENSION

Case dimension: 150(L) X 140(W) X 86(H)mm




12) PIN ASSIGNMENT

12.1) Standard Pin Assignment.

12.1.1) P1: 20 Pin & Wire

ATX Main Power Supply Connector

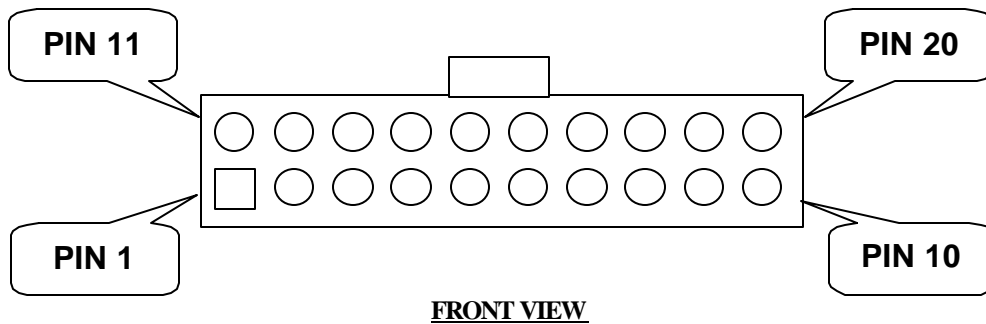

Pin	Signal	Wire		Pin	Signal	Wire	
1	+3.3 VDC	Orange	18AWG	11	+3.3 VDC	Orange	18AWG
2	+3.3 VDC	Orange	18AWG	12	-12 VDC	Blue	20AWG
2	+3.3 sense	Brown	22AWG				
3	COM	Black	18+22AWG	13	COM	Black	18AWG
4	+5 VDC	Red	18AWG	14	PS-ON	Green	20AWG
5	COM	Black	18AWG	15	COM	Black	18AWG
6	+5 VDC	Red	18AWG	16	COM	Black	18AWG
7	COM	Black	18AWG	17	COM	Black	18AWG
8	POK	Gray	20AWG	18	-5 VDC	White	20AWG
9	+5 VSB	Purple	20AWG	19	+5 VDC	Red	18AWG
10	+12 VDC	Yellow	18AWG	20	+5 VDC	Red	18AWG

12.1.2) P1: 6 Pin & Wire

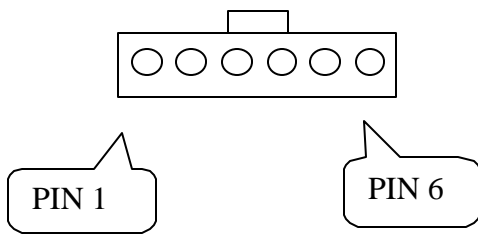


FIG.3

Pin	Signal	18AWG Wire
1	+5 VDC	Red
2	+3.3 VDC	Orange
3	+3.3 VDC	Orange
4	COM	Black
5	COM	Black
6	COM	Black

12.1.3) Output Connector

Length: 750mm
B4P+B4P+S4P *2
B4P+B4P+B4P *1

